




garland

RJ45 PATCH LEADS

Category 5E, PVC-V75 Sheath

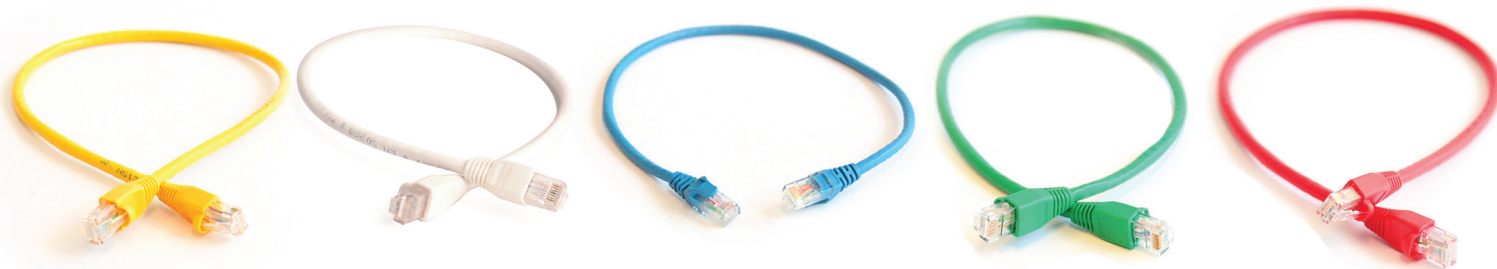

Applications

Used for interconnection between patch panels, outlets and equipment.


Specifications

Conductor	Bare Copper, 26AWG
Insulation	Thickness: MIN at any point: 0.15mm MAX AVG: 0.25mm Diameter: $0.85 \pm 0.06\text{mm}$
Jacketing	Material: PVC Thickness: MIN at any point: 0.46mm MAX AVG: 0.58mm Diameter: $5.6 \pm 0.3\text{mm}$

Pinout

Pair	P1 (T568B) P2 (T568B)	Wire
1	1	White/Orange
	2	Orange
2	3	White/Green
	4	Green
3	5	Blue
	6	White/Blue
4	7	White/Brown
	8	Brown

Diagram

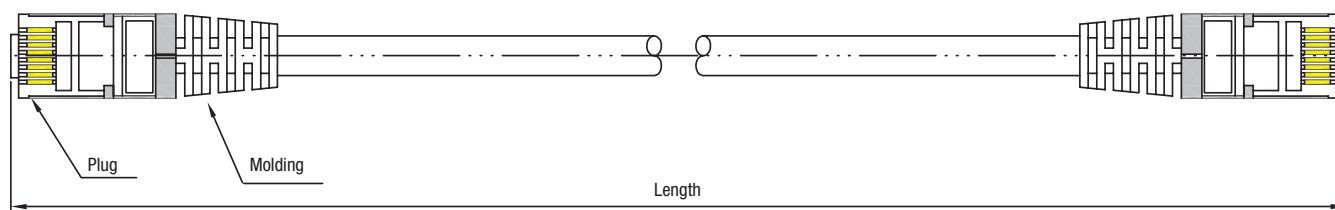

Ordering Information

Length	Blue	White	Red	Yellow	Green	Grey
0.5m	MTEL45450.5BL	MTEL45450.5WH	MTEL45450.5RD	MTEL45450.5YL	MTEL45450.5GN	MTEL45450.5GY
1.0m	MTEL45451.0BL	MTEL45451.0WH	MTEL45451.0RD	MTEL45451.0YL	MTEL45451.0GN	MTEL45451.0GY
2.0m	MTEL45452.0BL	MTEL45452.0WH	MTEL45452.0RD	MTEL45452.0YL	MTEL45452.0GN	MTEL45452.0GY
3.0m	MTEL45453.0BL	MTEL45453.0WH	MTEL45453.0RD	MTEL45453.0YL	MTEL45453.0GN	MTEL45453.0GY
5.0m	MTEL45455.0BL	MTEL45455.0WH	MTEL45455.0RD	MTEL45455.0YL	MTEL45455.0GN	MTEL45455.0GY
10.0m	MTEL454510.0BL	MTEL454510.0WH	MTEL454510.0RD	MTEL454510.0YL	MTEL454510.0GN	MTEL454510.0GY

With Garland, you are always well connected.

Sales Enquiries **1800 66 99 99**
www.garlandcables.com.au

made by



madison