



garland
cables

pro series

Industrial / Power / Data / Security / Fibre

Garland's Pro Series range is the experts' choice for high quality cables.

Control Cable


Part No: TSCW74LDYL

Description	Stranded 18AWG (7/0.4mm) PACW, 2 Cores, PVC Insulation, PVC Sheath.
Applicable Standards	AS/CA S-008, AS 1049
Suitable Applications	Low voltage, security and control applications.

Cable Construction Drawing



Cable Construction Relative Parts

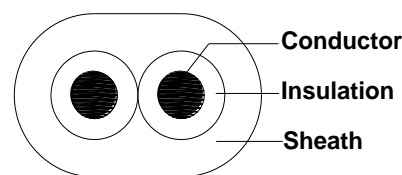

Cable Description

Conductor	AWG	Stranding	Area(mm ²)	Diameter(mm)	Material
	18	7/0.40	0.88	1.22	PACW
Insulation	Cores : 2		Material : PVC		
	Colour : Red, White		Nominal Thickness (mm) : 0.48		
	Nominal OD (mm) : 2.2				
Sheath	Material : PVC		Colour : Mellon Yellow(RAL 1028)		
	Nominal Thickness (mm) : 0.50		Nominal OD (mm) : 3.2 x 6.4		

With Garland, you are always well connected.

Sales Enquiries 1800 66 99 99
www.madisontech.com.au/garland

made by





garland
cables

pro series

Industrial / Power / Data / Security / Fibre

Garland's Pro Series range is the experts' choice for high quality cables.

Electrical Properties

Voltage Rating	ELV
Max. Conductor DC Resistance @ 20°C	21.8Ω/km
Min. Insulation Resistance @ 20°C	50MΩ.km
Voltage Test: Conductor to core	1.5 kV ac/1min
Voltage Test: Core to sheath	3.0 kV ac/1min

Mechanical Properties

Operating Temperature Range	-15 to 70°C
Max. Recommended Pulling Tension	123N
Min. Bend Radius (install)	32mm
Approximate Mass	4.09kg/100m

Sheath Printing  GARLAND TWIN SHEATHED CONTROL TSCW74LD - 2 X 7/0.4mm - MM/YYYY - "Mmark"

Supply Information

Pack Size	Pack Type	Dimensions	Qty Per Carton	Cartons Per Pallet
500m	Wooden Reel	W33 x H21.8cm	1R	

Document Change Record	Issue	Date	Prepared by	Approved By
	01	06-12-2012	LLS	Pent
Change History	Issue	Change		

With Garland, you are always well connected.

Sales Enquiries 1800 66 99 99
www.madisontech.com.au/garland

made by



madison